


SMOOTH BORE FEP/PTFE HOSE

Rubber Fab is proud to offer hoses constructed using a smooth PTFE inner core. Each hose is available with a carbon impregnated inner lining for static dissipation, and a non-stick contact surface which will not contaminate contacted substances. Some hoses are available in a variety of colors, and all are available in a variety of sizes, in bulk or fabricated assemblies.

RF-RT
RF-RTB
RF-ST
RF-STB
RF-STC
RF-STSB


PRODUCT LINE OVERVIEW:

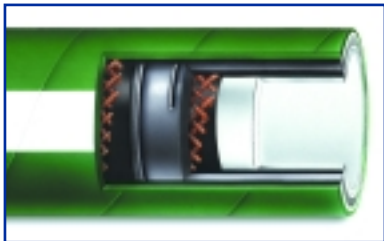

RF-RT
Smooth Bore FEP or Black Conductive FEP Lined
EPDM Covered Hose




RF-RTB

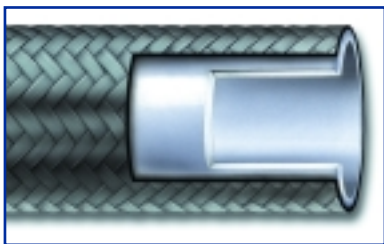


RF-ST
Smooth Bore PTFE or Black Conductive PTFE
Lined Hose with Braided Stainless Steel Cover



RF-STB

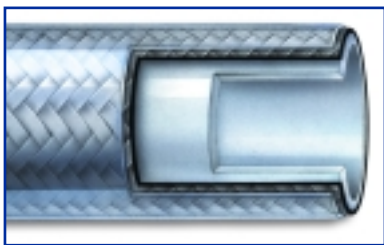

RF-STC
Smooth Bore PTFE or Black Conductive PTFE
Lined Hose with Braided Stainless Steel Outer and
Silicone Cover

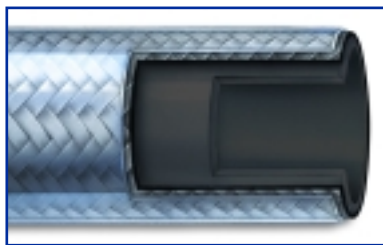


RF-STSB

Distributed by:



Highland
Equipment Inc.

Stainless Steel Equipment



RF-RT – Smooth Bore FEP Lined EPDM Covered Hose



RF-RT is the most flexible, kink resistant hose of its type in the industry.

TUBE:

Seamless White FEP

COVER:

EPDM Rubber (Abrasion resistant and oil resistant)

CONSTRUCTION:

Smooth FEP inner core bonded to an EPDM rubber tube

REINFORCEMENT:

Multiple braids, helical wire

TEMPERATURE:

-40°F to 350°F

Part Number	I.D.	O.D.	Working Pressure*	Vacuum (In. Hg)	Minimum Bend Radius
08RFRT	.50	.950	500 psi	29.9	2.0"
12RFRT	.75	1.23	500 psi	29.9	3.0"
16RFRT	1.0	1.52	450 psi	29.9	4.0"
20RFRT	1.25	1.73	350 psi	29.9	6.5"
24RFRT	1.5	2.12	300 psi	29.9	7.5"
32RFRT	2.0	2.67	250 psi	29.9	9.5"
40RFRT	2.5	3.20	200 psi	29.9	16.5"
48RFRT	3.0	3.88	150 psi	29.9	20.0"
64RFRT	4.0	4.70	150 psi	29.9	30.0"

*at 68°F

RF-RTB – Smooth Bore Black Conductive FEP Lined EPDM Covered Hose



TUBE:

Seamless Black Conductive FEP

COVER:

EPDM Rubber (Abrasion resistant and oil resistant)

CONSTRUCTION:

Smooth FEP inner core bonded to an EPDM rubber tube

REINFORCEMENT:

Multiple braids, helical wire

TEMPERATURE:

-40°F to 350°F

Part Number	I.D.	O.D.	Working Pressure*	Vacuum @ 70°F	Minimum Bend Radius
08RFRTB	.50	.950	500 psi	29.9	2.0"
12RFRTB	.75	1.23	500 psi	29.9	3.0"
16RFRTB	1.0	1.52	450 psi	29.9	4.0"
20RFRTB	1.25	1.73	350 psi	29.9	7.0"
24RFRTB	1.5	2.12	300 psi	29.9	7.5"
32RFRTB	2.0	2.67	250 psi	29.9	9.5"
40RFRTB	2.5	3.20	200 psi	29.9	16.5"
48RFRTB	3.0	3.88	150 psi	29.9	20.0"
64RFRTB	4.0	4.70	150 psi	29.9	30.0"

*at 68°F

RF-RT RF-RTB

Approvals

- 3A Sanitary
- USP Class VI
- FDA 21 CFR 17.1550
- FDA 21 CFR 17.2600

Features

- Extremely flexible
- Excellent kink resistance
- EPDM Rubber outer cover has multiple textile plies along the entire length
- Double steel wire helix for improved bend radius and shape retention
- Liner is smooth FEP, bonded for full vacuum service
- Non-stick contact surface will not contaminate contacted substances
- Inert and resistant to most chemicals and reagents
- Cleanable by SIP, CIP, COP methods
- Machine braid-reinforced product designed for safety at higher than normal pressures. Recommended rated pressures are based on at least 4:1 minimum burst to operating pressure ratio. Most sizes exceed this safety minimum.
- Conductive black liner available
- Available in custom colors
- Available in bulk or fabricated assemblies

Applications

- Pharmaceutical processing
- Water, acid and chemical transfer
- Hot CIP solutions
- Distillery piping systems
- Electronic industries
- Viscous fluid transfer
- Food and beverage
- Load cells
- Cosmetics

Connections

- Broad variety of fittings in 316L Stainless Steel
- PTFE encapsulated
- Kynar®/PVDF and other non-metallic materials
- Electropolished Stainless Steel fittings available
- Crimped fittings available in other high quality alloys


Also Available

- Rubber Fab offers a full line of high purity gaskets from mini to 12".

Distributed by:




RF-ST – Smooth Bore PTFE Lined Hose with Braided Stainless Steel Cover

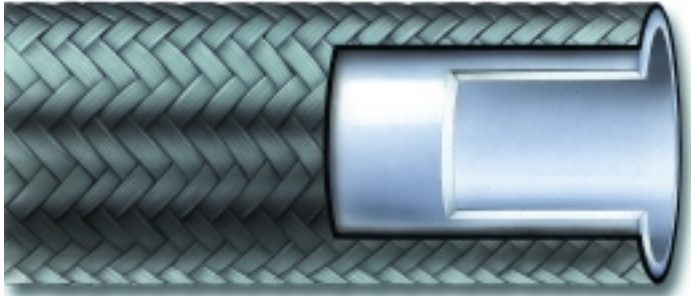

TUBE: Seamless White PTFE	Part Number	I.D.	O.D.	Working Pressure*	Minimum Bend Radius
	04RFST	.250	.375	3000 psi	2.5"
COVER: Braided Stainless Steel	06RFST	.375	.520	2500 psi	3.5"
	08RFST	.500	.648	2000 psi	4.0"
TEMPERATURE: -100°F to 500°F	12RFST	.750	.910	1200 psi	7.5"
	16RFST	1.00	1.13	800 psi	12.0"
	24RFST	1.50	1.67	900 psi	14.0"

*at 68°F

RF-STB – Smooth Bore Black Conductive PTFE Lined Hose with Braided Stainless Steel Cover

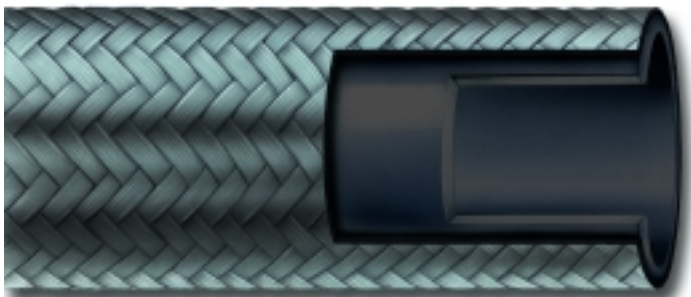

TUBE: Black Conductive PTFE	Part Number	I.D.	O.D.	Working Pressure*	Minimum Bend Radius
	04RFSTB	.250	.375	3000 psi	2.5"
COVER: Braided Stainless Steel	06RFSTB	.375	.520	2500 psi	3.5"
	08RFSTB	.500	.648	2000 psi	4.0"
TEMPERATURE: -100°F to 500°F	12RFSTB	.750	.910	1200 psi	7.5"
	16RFSTB	1.00	1.132	800 psi	12.0"
	24RFSTB	1.50	1.672	900 psi	14.0"

*at 68°F

RF-ST RF-STB

Approvals

- 3A Sanitary
- USP Class VI
- FDA 21 CFR 17.1550

Features

- Outer cover is stainless steel braid overwrap
- Lining is smooth PTFE inner core, non-stick surface
- Non-stick contact surface will not contaminate contacted substances
- Not affected by weather and will not age in service within the recommended temperature and pressure ratings
- Withstands high velocity and pressure surges
- Unaffected by continuous flexing or vibration when used in accordance with minimum bend radius specifications
- Conductive black liner available
- Autoclavable
- Available in bulk or fabricated assemblies

Applications

- Food processing
- Pharmaceutical processing
- Cosmetics
- Hot CIP solutions
- Chemical products
- Low pressure steam applications

Connections

- Broad variety of fittings in 316L Stainless Steel
- PTFE encapsulated
- Electropolished Stainless Steel fittings available
- Crimped fittings available in other high quality alloys
- Available with etched date or customer part number on crimp collars

Also Available

- Rubber Fab offers a full line of high purity gaskets from mini to 12".

Distributed by:



RF-ST5 – Smooth Bore PTFE Lined Hose with Braided Stainless Steel Outer and Silicone Cover



TUBE:
Seamless White PTFE

COVER:
Braided Stainless Steel and Silicone Outer Cover

TEMPERATURE:
-100°F to 500°F

Part Number	I.D.	O.D.	Working Pressure*	Minimum Bend Radius
04RFST5	.250	.375	3000 psi	2.5"
06RFST5	.375	.520	2500 psi	3.5"
08RFST5	.500	.648	2000 psi	4.0"
12RFST5	.750	.910	1200 psi	7.5"
16RFST5	1.00	1.13	800 psi	12.0"
24RFST5	1.50	1.67	900 psi	14.0"

*at 68°F

RF-ST5B – Smooth Bore Black Conductive PTFE Lined Hose with Braided Stainless Steel Outer and Silicone Cover



TUBE:
Black Conductive PTFE

COVER:
Braided Stainless Steel and Silicone Outer Cover

TEMPERATURE:
-100°F to 500°F

Part Number	I.D.	O.D.	Working Pressure*	Minimum Bend Radius
04RFSTB	.250	.375	3000 psi	2.5"
06RFSTB	.375	.520	2500 psi	3.5"
08RFSTB	.500	.648	2000 psi	4.0"
12RFSTB	.750	.910	1200 psi	7.5"
16RFSTB	1.00	1.13	800 psi	12.0"
24RFSTB	1.50	1.67	900 psi	14.0"

*at 68°F

136 The East Mall
Toronto, Ontario
M8Z 5V5

Tele: 416 236-9610
Fax: 416 236-9611
Toll Free: 800-956-5630

Distributed by:



Highland
Equipment Inc.

Stainless Steel Equipment

RF-ST5 RF-ST5B

Approvals

- 3A Sanitary
- USP Class VI
- FDA 21 CFR 17.1550

Features

- Outer cover is stainless steel braid overwrap
- Lining is smooth PTFE inner core, non-stick surface
- Non-stick contact surface will not contaminate contacted substances
- Not affected by weather and will not age in service within the recommended temperature and pressure ratings
- Withstands high velocity and pressure surges
- Unaffected by continuous flexing or vibration when used in accordance with minimum bend radius specifications
- Conductive black liner available
- Autoclavable
- Can be steam-cleaned
- Available in bulk or fabricated assemblies

Applications

- Food processing
- Pharmaceutical processing
- Cosmetics
- Hot CIP solutions
- Chemical products
- Low pressure steam applications


Connections

- Broad variety of fittings in 316L Stainless Steel
- PTFE encapsulated
- Kynar®/PVDF and other non-metallic materials
- Electropolished Stainless Steel fittings available
- Crimped fittings available in other high quality alloys

Also Available

- Rubber Fab offers a full line of high purity teflon gaskets from mini to 12".

Kynar® is a registered trademark of Elf Atochem.

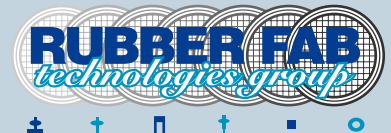

Rubber Fab Technologies Group
Limecrest Road

P.O. Box 626 • Andover, NJ 07821
phone: 973-579-2959 fax: 973-579-7275

www.rubberfab.com

Rubber Fab Technologies Group is a member of:

